

MPL Power supply unit 3-phase, smoothed IN: 208-520VAC +/- 5% OUT: 24V/50ADC

Current: 50 A
Output rating: 1200 W

Image



- Protection IP00

Vicarious picture

Approvals



Input

Input voltage (external fuse)	3 × 208...520 V AC
Frequency	50/60 Hz

Output

Output voltage	24 V DC (SELV)
Output current	max. 50 A
Efficiency	77 %
Ripple	max. 2 % rms
Output fuse (external)	50 A T
Output filter	LED, VDR and smoothing capacitor


General data

Standards	(EN 61558-2-6), (EN 62041) category 1, (EN 55011 B), (EN 61000-3-2)
Temperature range	-20...+55 °C, for any mounting position at vertical wall, no condensation
Mounting method	Key-hole mounting
Dimensions H × W × D	280 x 134 x 313 mm
Fixing centers a × b × c	256.5 x 108 x 11 mm

Commercial data

Net weight	22000
Weight unit	gram
Basic unit	pc.
Customs tariff number	85044090
Unit (piece)	1
Limited value	1

Circuit diagram

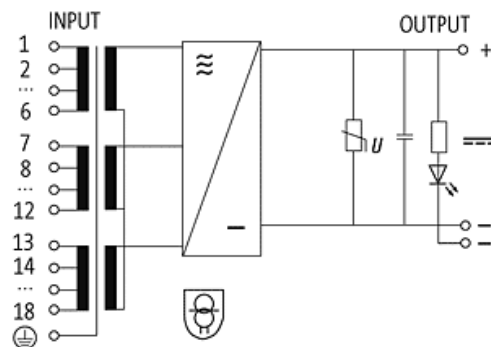

Dimension drawing

