

MODEL No. NJT8318 & NJT8319 series

< Features >

* High Temperature Operating

- Operation Guarantee Temperature Range:
-40 to +75 degree C

* RF Frequency Line-up

- Universal Ku-band: 13.75 to 14.5 GHz
- Standard Ku-band: 14.0 to 14.5 GHz

* High Efficiency Output Power

(8W Model)

- P1dB: +39 dBm min. over temperature
- Power Consumption: 90 W max.
- IM3: -28 dBc @ Pout ≤ +36 dBm

(16W Model)

- P1dB: +42 dBm min. over temperature
- Power Consumption: 170 W max.
- IM3: -28 dBc @ Pout ≤ +39 dBm

* FSK Modulation M&C Option

* Smallest Size & Lightest Weight

- Dimension: 180 (L) x 130 (W) x 80 (H) mm
- Weight: 2.4 kg



< Line-Up >


Model No.	RF Frequency	Local Frequency	IF Frequency	Output Power @ P1dB	IF Connector	Port for Voltage Input	Power Supply	M&C Option
NJT8319N	14.0 to 14.5GHz (Standard Ku-band)	13.05 GHz	950 to 1,450 MHz	16W Linear (+42dBm min.)	N-type	Same as	+36 to +60 V DC Power	N/A
NJT8319F					F-type	IF Connector		
NJT8319NM					N-type	MS Connector		
NJT8319FM					F-type	(Separete Port)		
NJT8319NK					N-type	Same as		FSK Communication M&C
NJT8319FK					F-type	IF Connector		
NJT8319NMK					N-type	MS Connector		
NJT8319FMK					F-type	(Separete Port)		
NJT8319UN	13.75 to 14.5GHz (Universal Ku-band)	12.80 GHz	950 to 1,700 MHz		N-type	Same as		N/A
NJT8319UF					F-type	IF Connector		
NJT8319UNM					N-type	MS Connector		
NJT8319UFM					F-type	(Separete Port)		
NJT8319UNK					N-type	Same as		FSK Communication M&C
NJT8319UFK					F-type	IF Connector		
NJT8319UNMK					N-type	MS Connector		
NJT8319UFMK					F-type	(Separete Port)		
NJT8318N	14.0 to 14.5GHz (Standard Ku-band)	13.05 GHz	950 to 1,450 MHz	8W Linear (+39dBm min.)	N-type	Same as	+18 to +60 V DC Power	N/A
NJT8318F					F-type	IF Connector		
NJT8318NM					N-type	MS Connector		
NJT8318FM					F-type	(Separete Port)		
NJT8318NK					N-type	Same as		FSK Communication M&C
NJT8318FK					F-type	IF Connector		
NJT8318NMK					N-type	MS Connector		
NJT8318FMK					F-type	(Separete Port)		
NJT8318UN	13.75 to 14.5GHz (Universal Ku-band)	12.80 GHz	950 to 1,700 MHz		N-type	Same as		N/A
NJT8318UF					F-type	IF Connector		
NJT8318UNM					N-type	MS Connector		
NJT8318UFM					F-type	(Separete Port)		
NJT8318UNK					N-type	Same as		FSK Communication M&C
NJT8318UFK					F-type	IF Connector		
NJT8318UNMK					N-type	MS Connector		
NJT8318UFMK					F-type	(Separete Port)		

*Note: The contents of this sheet are subject to change without notice.

(1/4)
Rev.03 Ku 8W/16W BUC_NJT8318/19

MODEL No. **NJT8318 & NJT8319** series

< Model Numbering System >

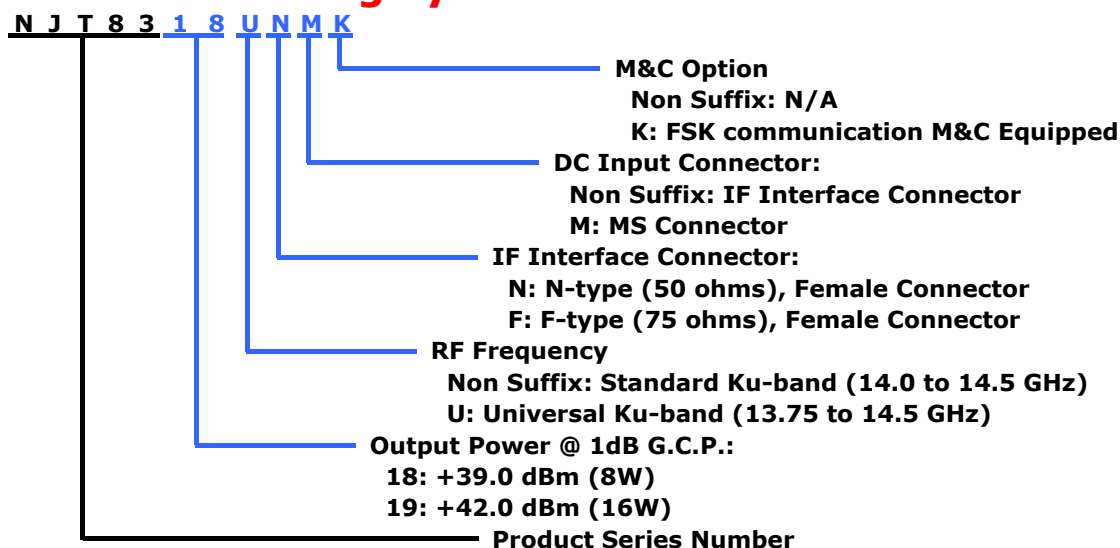

< Specifications >



Item	Specifications	
	8W (+39 dBm min.)	16W (+42 dBm min.)
Output Power @ 1dB G.C.P. (P1dB)	+39 dBm min. over temperature	+42 dBm min. over temperature
Linear Gain	65 dB nom., 59 dB min.	68 dB nom., 62 dB min.
Gain Variation over frequency	Standard Ku-band: 5 dBp-p max. over 500 MHz / 2 dBp-p max. over 36 MHz Universal Ku-band: 5 dBp-p max. over 750 MHz / 2 dBp-p max. over 36 MHz	
Gain Stability over temperature	2 dBp-p typ., 5 dBp-p max.	
IM3	-28 dBc typ., -24 dBc max. @ total power ≤ Pout – 3dB	
ACPR	-28 dBc typ. @ Pout ≤ Pout – 1dB	
L.O. Phase Noise	-60 dBc/Hz max. @ 100 Hz -70 dBc/Hz max. @ 1 kHz -80 dBc/Hz max. @ 10 kHz -90 dBc/Hz max. @ 100 kHz -100 dBc/Hz max. @ 1 MHz	
Input V.S.W.R.	2 : 1 max.	
Output V.S.W.R.	2 : 1 max.	
DC Power Requirement (1) Voltage Range (2) Power Consumption	+18 to +60 VDC	+36 to +60 VDC
@ No IF Signal @ P1dB	65 W typ. 90 W max.	140 W typ. 170 W max.
Mute	Shut off the HPA in case of L.O. unlocked or no 10 MHz reference signal	
LED Indicator	GREEN: L.O. locked / RED: L.O. unlocked (or no 10 MHz reference signal)	
M&C Function	FSK Modulation M&C: Power Monitor / TX On/Off Control / Alarm ... etc	
Temperature Range (ambient)	Operating: -40 to +75 C (Operation Guarantee) -40 to +55 C (Performance Guarantee) Storage: -40 to +75 C	
Dimension & Housing	180 (L) x 130 (W) x 80 (H) mm [7.09" (L) x 5.12" (W) x 3.15" (H)] without interface connector and screws	
Weight	2.4 kg max. [5.3 lbs max.]	

■ Universal/Standard Ku-band **8W/16W** BUC


Coming
Soon

MODEL No. **NJT8318 & NJT8319** series

< Outline >

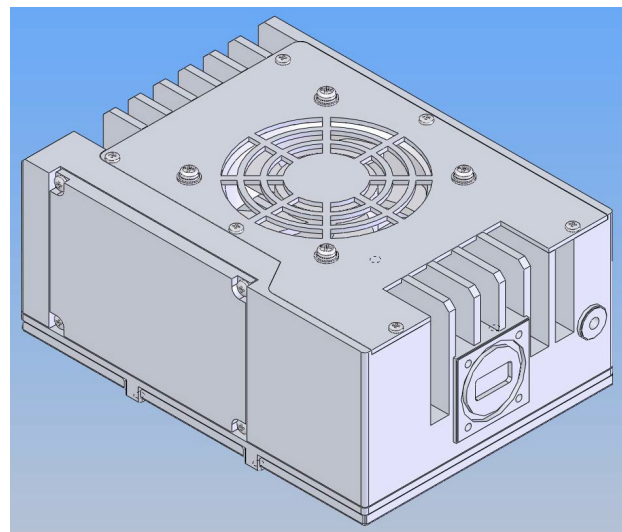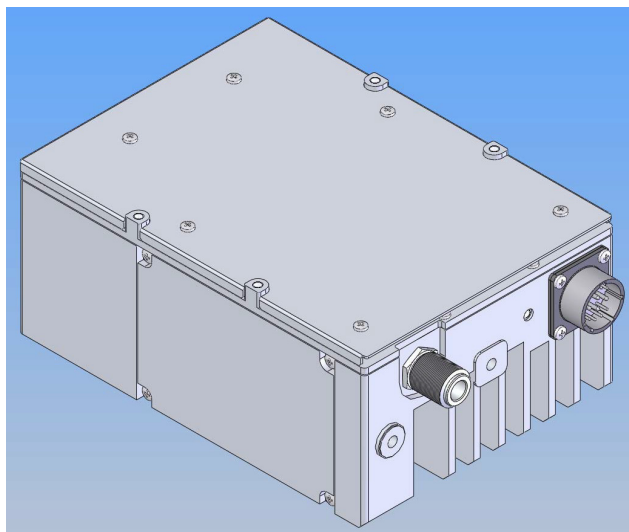

< Drawing >

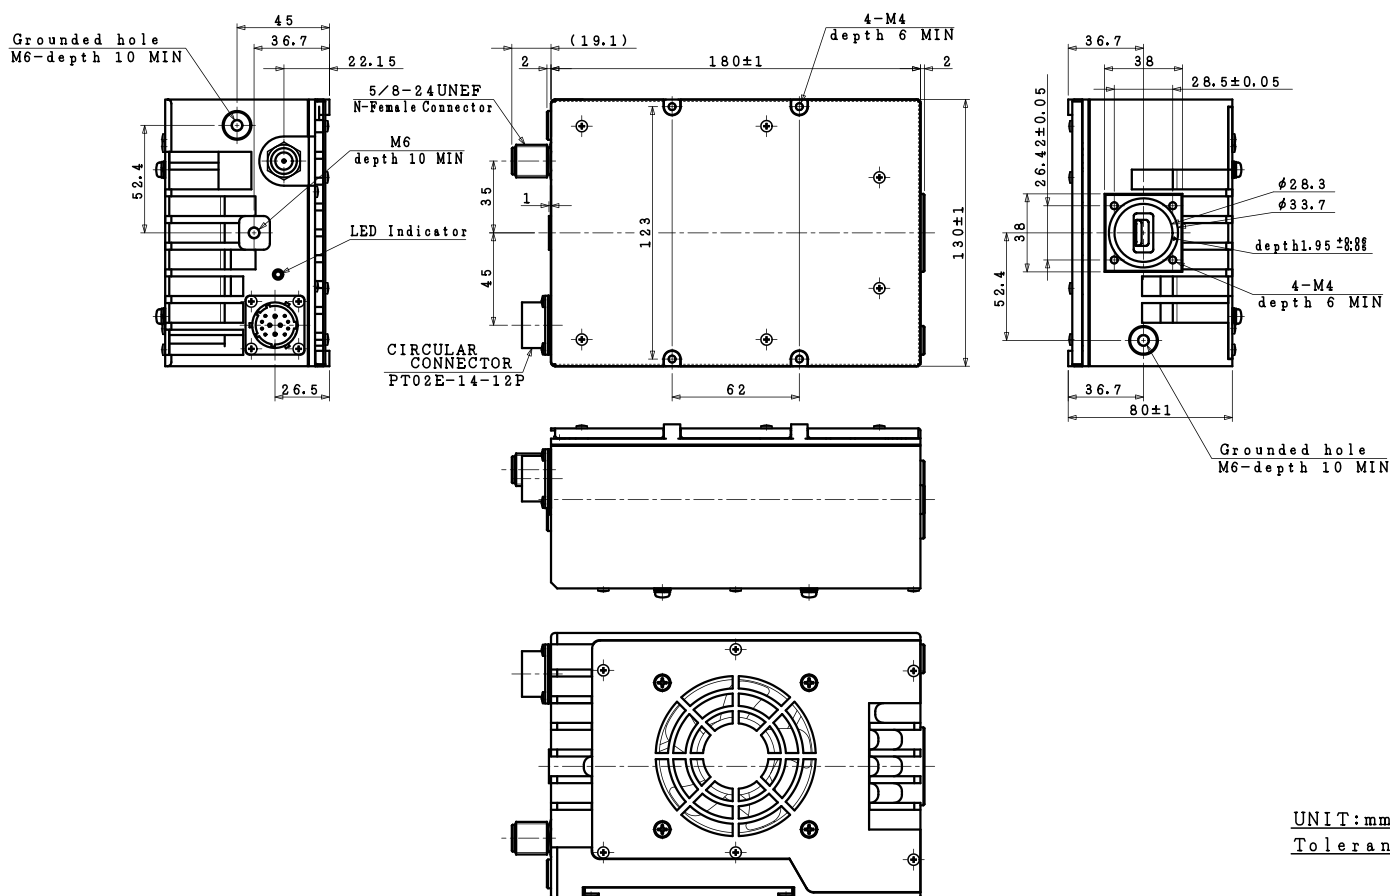

*Note: The contents of this sheet are subject to change without notice.

Rev.03 Ku 8W/16W BUC_NJT8318/19

AC Power Operating Option

200W AC/DC Power Supply Unit (PSU) - ODU -


< Features >

* Outdoor AC/DC Power Supply

- Active Power Factor Correction (PFC) Equipped
- Input AC Voltage: 90 to 240 V
- Output DC Voltage: 48 V typ.
- Output DC Power: 200 W max.

* Smallest Size & Lightest Weight


- Dimension: 186 (L) x 133 (W) x 60 (H) mm
- Weight: 1.6 kg

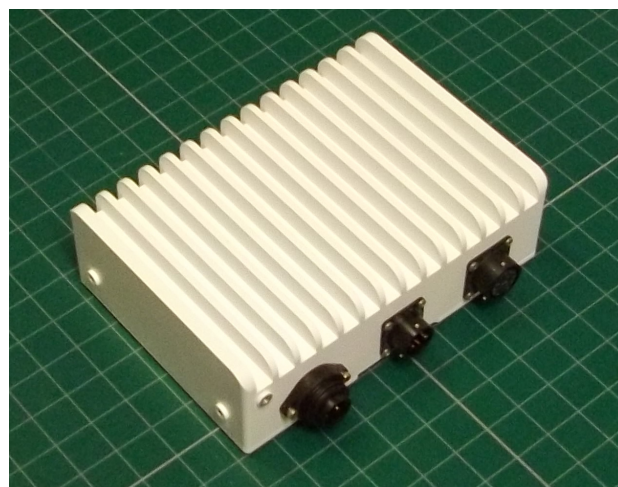

< Specifications >

Item	Specifications
Input AC Voltage Range	90 to 240 V
Input AC Power	300 VA max.
Output DC Voltage	+48 V typ.
Output DC Power Capacity	200 W max.
Efficiency	90 %
Power Factor	0.9
Temperature Range (ambient)	Operating: -40 to +55 C Storage: -40 to +75 C
Dimension & Housing	186 (L) x 133 (W) x 60 (H) mm [7.32" (L) x 5.24" (W) x 2.36" (H)] without interface connector and screws
Weight	1.6 kg max. [3.5 lbs max.]

< Outline >

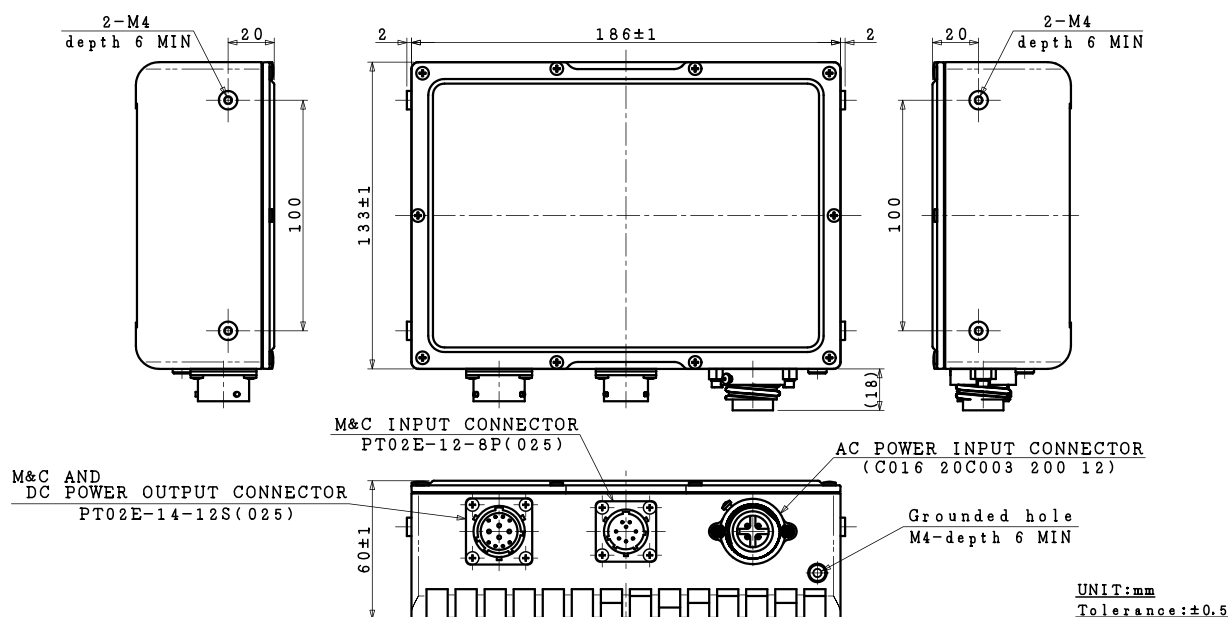

*Note: The contents of this sheet are subject to change without notice.

Rev.03 Ku 8W/16W BUC_NJT8318/19