

# 10MHz Extractor / Inserter



## Description

The Global Professional 10MHz Extractor Inserter

- Inserts 10MHz onto an L Band Path
- Extracts 10MHz from an L Band Path
- Blocks 10MHz from an L Band Path

## Specification

L Band Frequency Pass

950 - 2150 MHz,

Through loss at L Band

< 1dB

Through loss at 10MHz

< 0.5dB

Max DC Voltage

75V

Max DC Current

4 Amps

Connectors

N Type 50 Ohm Female (standard)

BNC, TNC , SMA & F type Options Available


Dimensions

88 x 42 x 26 mm

Mounting Dimensions

78mm x 32mm ( M3 )

## L Band Passing Port

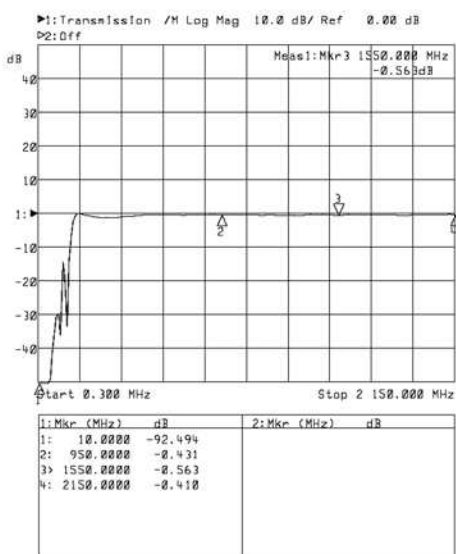

## 10MHz Passing Port

